

SPC FLOOR PANELS

STONE / POLYMER / COMPOSITE


TECHNICAL CARD

30 YEARS
GUARANTEE
RESIDENTIAL

CLICK SYSTEM
CLICK
Fold Down



- Easy installation
- Fire resistant
- Suitable for floor heating
- Waterproof
- Abrasion resistant
- Soundproof against footsteps
- Warm surface

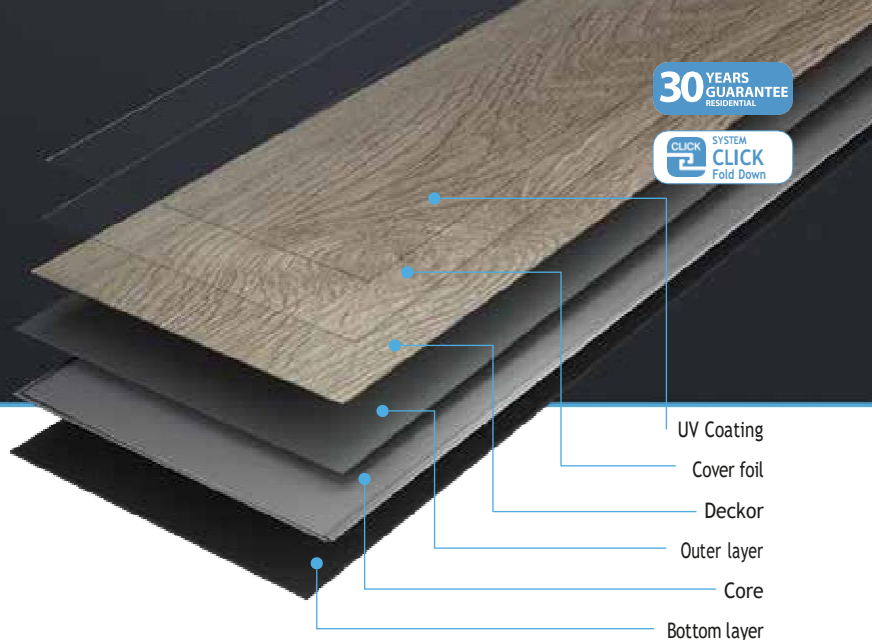

PRODUCT INFORMATION:

STONE II

Floortype	floating floor
Material	mineral - polymer composite
Dimensions	457 mm x 914 mm
Panel thickness	5,5 mm
Protective layer thickness	0,55 mm
Packaging	6 pcs (2,51 m ² /28,47 kg)
Warranty (domestic use)	30 years
Warranty (public use)	5 years
Assembly system	I4F 3L click
Abrasion class (domestic use)	23
Abrasion class (commercial use)	34
Dilatation	<100 m ²
Underfloor heating	yes / max 27 °C
V-groove	no

! We recommend underlay used with SALAG Floor panels to be maximum 2 mm thick.

TECHNICAL DATA:

Flame retardancy classification	EN 13501-1	B _{f1} -s1
Slip resistance	EN 13893	DS
Antistatic feature	EN 1815	≤2 kV
Chair wheel influence	PN-EN 425	0,02 mm
Ultraviolet rays endurance	EN ISO 105-B2	> 6
Chemical endurance	EN ISO 26987	Immune
Impact sound reduction	EN ISO 717-2	ΔLw = 20dB
Residual indentation	EN ISO 24343-1	max 0,01 mm
Heat conduction	EN 12667	0,37 W/mK
Thermal resistance	EN 12667	0,07 m ² K/W
Formaldehyde content	PN-EN 717-1	-